


## THE PROJECT

In March 2018 Ashcourt were appointed as the principal contractor on a project which involved structural stabilisation and refurbishment works to a York Restaurant which was damaged by the 2015 York floods.

The initial phase of the project involved stripping the structure back to its bare shell, including the removal of the existing services and structural alterations to facilitate the installation of a temporary works support system.

Two temporary works schemes were then installed, one to provide an access scaffold within the river and the second to support the structure during the permanent works installation. Both schemes were designed to transfer the loads off the building and through the building to the structure beyond, during new foundation installation.

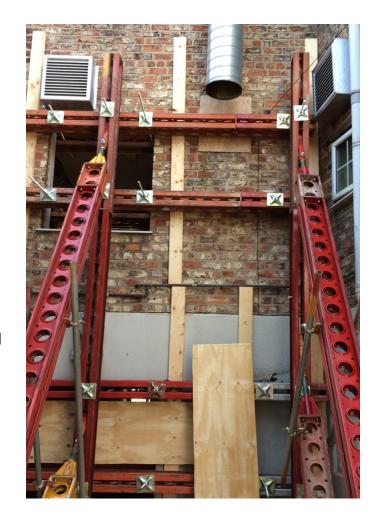

## THE PROJECT

Once the existing structure was secure, the permanent works commenced, which included the excavation of the internal basement and the installation of a new piled reinforced raft, working under an Archaeological watching brief.

The final phase of project, following the removal of the temporary works, involved an internal refurbishment package, to reinstate the building back to a working restaurant.



## **DIVISIONS INVOLVED**



Civil Engineering



Construction

